

# Hydrotech Warranty Offerings

## with Monolithic Membrane 6125®



### WATERPROOFING:

TYPE OF WARRANTY	WATERTIGHTNESS				ULTIMATE ASSEMBLY®		
	5	10	15	20	5	10	15
DURATION (Years)	5	10	15	20	5	10	15
MM6125-FR (Fabric-reinforced)	YES	YES	YES	YES	YES	YES	YES
MM6125 (Standard)	YES	NO	NO	NO	YES	NO	NO

### ROOFING:

TYPE OF WARRANTY	WATERTIGHTNESS				ULTIMATE/GARDEN ROOF® ASSEMBLY			
	5	10	15	20	5	10	15	20
DURATION (Years)	5	10	15	20	5	10	15	20
MM6125-FR (Fabric-reinforced)	YES	YES	YES	YES	YES	YES	YES	YES
MM6125 (Standard)	YES	YES	NO	NO	YES	YES	NO	NO

#### Notes:

1. Material warranties are available for terms up to 20 years.
2. Thermal warranties are available for DuPont™ Styrofoam™ RM, PD, HI-40, HI-60 and HI-100 for up to 30 years.
3. Wind resistance warranty is available for DuPont™ Styrofoam™ in roofing applications; up to 70 mph gust wind speed; ballast review required.
4. Maximum warranty on Pavers is 10 years.
5. Maximum warranty on Garden Roof® components is 20 years.
6. Plant coverage warranties are available for 2 years when part of a complete Garden Roof Assembly that is properly maintained.
7. With respect to the Ultimate or Garden Roof Assembly warranty, when two separate contractors are involved, Hydrotech will issue the required warranty (upon substantial completion of the work) through our "authorized applicator" responsible for installing the waterproofing/roofing membrane.
8. Hydrotech includes removal and replacement of overburden, supplied by Hydrotech, if a warranted repair to the membrane is required.
9. For warranty terms of 20 years or greater, the substrate for MM6125 must be concrete.

#### HYDROFLEX PROTECTION SHEET

MM6125 (125 mils)


#### FLEX-FLASH F REINFORCEMENT

MM6125 (90 mils)

#### SURFACE CONDITIONER

#### APPROVED SUBSTRATE

(CONTACT HYDROTECH)

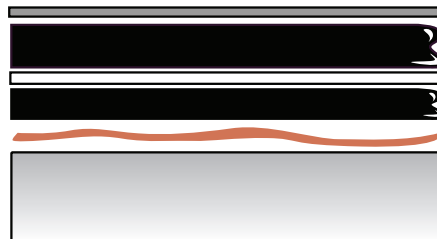

#### MM6125-FR (FABRIC REINFORCED) ASSEMBLY

Consists of one coat of membrane at a thickness of 90 mils, into which is embedded Flex Flash F, a spunbonded polyester fabric. A second coat of membrane is then applied over the fabric at 125 mils minimum, encapsulating the fabric between the two layers of membrane. Hydroflex protection sheet is then embedded into the membrane.


#### HYDROFLEX PROTECTION SHEET

MM6125

#### SURFACE CONDITIONER

#### APPROVED SUBSTRATE

(CONTACT HYDROTECH)

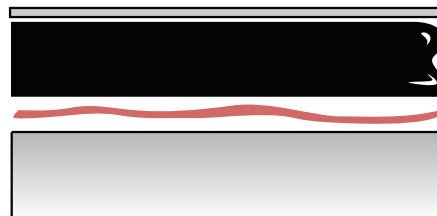

#### MM6125 STANDARD ASSEMBLY

Consists of one coat of membrane at an average thickness of 180 mils (125 mils minimum) with Hydroflex protection sheet embedded in the membrane. To be considered for new concrete construction only.

For further detailed information regarding American Hydrotech's warranty programs, including pricing, terms and conditions, contact your Hydrotech local representative or call Hydrotech direct at 1-800-277-6125.



American Hydrotech, Inc.  
401 N. Michigan Ave, Chicago, Illinois 60611  
800.877.6125; 312.337.4998  
www.hydrotechusa.com