

VERSADJUST PEDESTALS


as marketed by American Hydrotech, Inc.



Stone Tiles



Wood Tiles

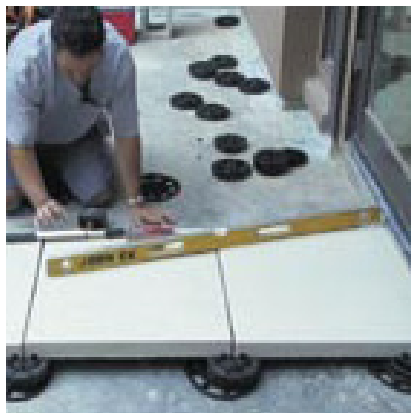

Concrete Pavers




Granite Slabs



Design and build level decks on rooftops or any structural surface

- Maximum Performance Pedestal
- Industrial Quality
- Maximum Height Pedestal System: Up to 24"
- Built In Base Leveling
- Fast Screw-to-Adjust Installation
- Made In The USA

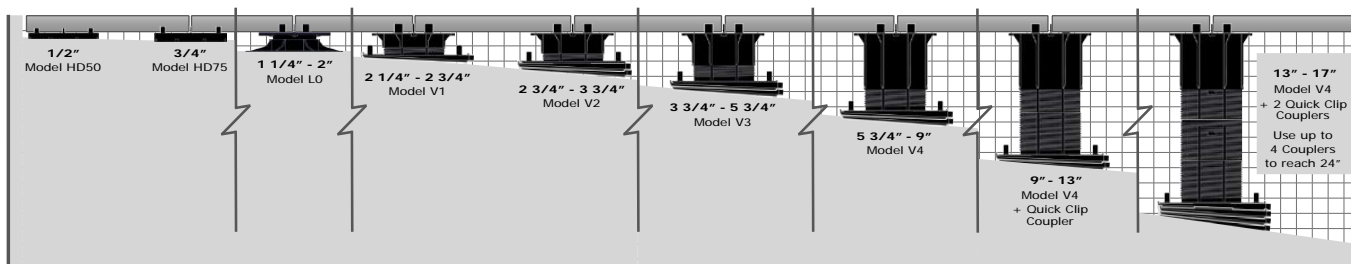

VERSADJUST PEDESTALS





as marketed by American Hydrotech, Inc.



Specifications

- Supports up to 1,500 lbs. (FS2)
- Maximum elevation to 24" using couplers
- Impervious to water, mold and freeze-thaw
- Preassembled
- Packaged in weather resistant boxes
- Made in the USA
- Contains 20% Post-Industrial Recycled Material
- Engagement 'bumps' warn of over-extension

Brace System

	BB-C	Brace Collar - Fits Models V3, V4
	BB-S	Short Brace - For 16" - 22" Deck Tiles - Kit contains 2 ea 8" Brace Pieces, Screws & Nuts
	BB-L	Long Brace - For 22" - 36" Deck Tiles - Kit contains 2 ea 16" Brace Pieces, Screws & Nuts
	BB-Pegs	Base Pegs - Insert up to 6 pegs into base of V series Pedestals

Model Number	Description	Height Range	Max Height
	V1 Adjustable Pedestal	2 1/4" - 2 3/4"	2 3/4"
	V2 Adjustable Pedestal	2 3/4" - 3 3/4"	3 3/4"
	V3 Adjustable Pedestal	3 3/4" - 5 3/4"	5 3/4"
	V4 Adjustable Pedestal	5 3/4" - 9 3/4"	9 3/4"
	VC2 Quick Clip Coupler	Insert VC2 into Base or other VC2s Adds 4" each	Utilize up to 4 VC2's to reach 24"

Tab Choices

	VT18	Tab	1/8" wide
	VT316	Tab	3/16" wide

Accessories

	VT18	Use for Ultra Low Height	1/8" high	Tabs 1/8" w
	VT316			Tabs 3/16" w
	HD25	Fixed Height Stackable Pedestals	1/4"	Tabs 1/8" or 3/16" wide
	HD50		1/2"	
	HD75		3/4"	
	L0	Low Height Adjustable Pedestal	1 1/4" - 2"	2"
	B11	Rubber Shim	1/16"	
	PS1	Plastic Shim	1/8"	
	LD4	Base Leveler	Use up to 2	1/2" - 1" per foot slope
	FS1	Wood Tile Fastening Kit: Utilize to secure Bison Wood Tiles to pedestal system		
	FIB	Floating Insulation Base 12" x 12" x 11/16" For use over roofing systems with 20 psi insulation		
	FFB <small>not pictured</small>	Floating Foundation Base 12" x 12" x 1/4" For use on grade (soil) under each pedestal.		

IMPORTANT: Refer to Versadjust product specifications to ensure proper use and installation. Find specifications at www.BisonDeckSupports.com.



A SIKA COMPANY

2024-BR-1-UCPVB-DY

© 2024 AMERICAN HYDROTECH INC.

American Hydrotech, Inc.

401 North Michigan Ave, Chicago, Illinois 60611
800.877.6125
312.337.4998

www.hydrotechusa.com

Please visit our website or call for information on Hydrotech's full line of high-performance construction products

The information given is based on data and knowledge considered to be true and correct and is offered for the user's consideration, investigation and verification. The information is subject to change without notice. The determination of suitability and fitness of the products and the application described herein for a particular purpose is the sole responsibility of the user. Please read all statements, warranties, recommendations and suggestions in conjunction with the conditions of sale which apply to all goods sold by American Hydrotech, Inc. for the United States and abroad, or Hydrotech Membrane Corporation for Canada, including the express disclaimer by each company of the implied warranties of merchantability or fitness for a particular purpose. Nothing stated herein is intended to infringe on any patent or copyright.